

Hand pallet trucks



EH 20



EH 20S 55
Low profile



EH 30S
High capacity



EH 20 P
Scale



EH 10 MHL



EH 10 EHL



EH 20S G
Galvanized



EH 20S Inox

EH series : Hand pallet trucks


Designation	1.1	Manufacturer			MANITOU			
	1.2	Model type			EH 20S & EH 20L	EH 20S 55 Low profile	EH 10 MHL (Manual High Lift)	EH 10 EHL (Electric High Lift)
	1.4	Nominal capacity	Q	t	2	2	1	
	1.5	Centre of gravity	c	mm	600	600	600	
	1.7	Driving method			Walk-along	Walk-along	Walk-along	
	1.8	Wheels: N=Nylon, C=Rubber, P=Polyurethane operators side/load side			N or C or P / N or P	C/P	P/P	
Dimensions	2.1.1	Lifting height	h3	mm	205	170	800	
	2.2.1	Lowered height	s	mm	85	55	85	
	2.2.2	Standard forklength	l	mm	1150	1150	1140	
	2.2.3	Width over forks	m	mm	530 & 680	540	520	
	2.2.4	Forkwidth	n	mm	150	160	160	
	2.3.1	Length of drive unit	L2	mm	400	400	340	480
	2.3.2	Length over all	L	mm	1550	1550	1480	1620
	2.6.1	Turning radius	Wa	mm	1350	1350	1280	1420
Weight	3.1	Weight		kg	72 & 75	83	105	140
Chassis	5.1.1	Number of wheels operators side/load side			2 / 2 or 4	2 / 4	2 / 2	
	5.1.2	Wheel dimensions on load side		mm	82 or 72	50	88	
	5.1.3	Wheel dimensions on operators side		mm	200	180	150	
	5.3.2	Parking brake			Hand (option)	Without	Without	
Performances	6.2	Battery (voltage/capacity)	V/Ah	-	-	-	-	12 V / 63 A/h

EH 20S & EH 20L :

- Quick lift pump standard 2 years warranty
- EH 20S Fork length 800 mm available on request
- EH 20S & EH 20L Fork length 950 mm on request
- Entry and exit rollers at forktips
- Rubber covered handle
- Parking brake (option) only available with rubber steerwheel



Entry and exit rollers

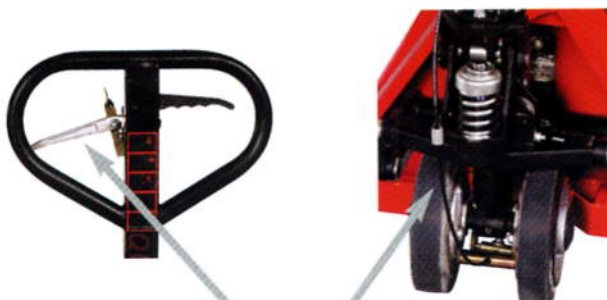

Parking brake

EH 10 MHL & EH 10 EHL :

- Polyurethane steerwheel
- Single polyurethane load rollers
- Stabilisers (EH 10 MHL) in front of the load rollers and steerwheel to block the truck when liftheight of 420 mm is reached
- Rubber covered handle
- External charger 10 ah/12v (EH 10 EHL)
- Lift/lower button on handletop to control the electric lift (EH 10 EHL)
- Charge indicator of battery (EH 10 EHL)
- Yellow warning stripes on scissor legs
- Safety device on handle to block lifting or lowering action on the lever (EH 10 MHL)

The highlift pallet truck **EH 10 MHL & EH 10 EHL** applications of hand pallet trucks and liftingtables.

With its 1 t lifting capacity (electric or manual) it is a must in handling to bring the load to an ergonomic workingheight.



Stabilisers

EH series : Hand pallet trucks

				MANITOU				
				EH 20S Galvanized	EH 20S Inox	EH 30S High capacity	EH 20S/L P Scale	
Designation	1.1	Manufacturer						
	1.2	Model type						
	1.4	Nominal capacity	Q	t	2	2	3	2
	1.5	Centre of gravity	c	mm	600	600	600	600
	1.7	Driving method			Walk-along		Walk-along	Walk-along
	1.8	Wheels: N=Nylon, C=Rubber, P=Polyurethane operators side/load side			N / N	N / N	C / P	C / P
Dimensions	2.1.1	Lifting height	h3	mm	200	200	200	200
	2.2.1	Lowered height	s	mm	85	85	85	85
	2.2.2	Standard forklength	l	mm	1150		1150	1150
	2.2.3	Width over forks	m	mm	530	540	540	550 & 680
	2.2.4	Forkwidth	n	mm	150	160	160	180
	2.3.1	Length of drive unit	L2	mm	400		400	400
	2.3.2	Length over all	L	mm	1550	1550	1550	1550
	2.6.1	Turning radius	Wa	mm	1350	1350	1350	1350
Weight	3.1	Weight		kg	71	78	89	122
Chassis	5.1.1	Number of wheels operators side/load side			2 / 2 or 4	2 / 2 or 4	2 / 4	2 / 4
	5.1.2	Wheel dimensions on load side		mm	82 or 72	82 or 72	80	80
	5.1.3	Wheel dimensions on operators side		mm	200	200	200	200
	5.3.2	Parking brake			Without		Without	Without
Performances	6.2	Battery (voltage/capacity)	V/Ah	-	-	-	-	

EH 20S Galvanized :

- Entry/exit rollers at forktips
- Drive wheel nylon
- Chassis, articulations, pushrods, axles and hydraulic unit in galvanized steel

EH 20S Inox :

- Nylon steerwheel
- Nylon single or tandem load wheels
- Entry and exit rollers at forktips
- Stainless steel AISI 316
- Chassis, articulations, pushrods, axles and hydraulic unit in stainless steel

EH 20S 55 :

- Rubber steerwheel
- Tandem polyurethane load rollers
- The 55 mm low profile forks allow entry in special pallets, container, furniture, etc...
- Rubber covered handle

EH 30S :

- Rubber steerwheel
- Entry/exit rollers at forktips
- Reinforced forks with mechanically welded bars for a 3 t capacity
- Rubber covered handle

EH 20 P scale :

- Graduation 1 kg
- Precision 0,1 %
- Functions : zero, tare, gross/nett and summation supplied with 4 non rechargeable batteries, 100 hours battery autonomy



Galvanized forks



Stainless steel forks



Manitou, leader mondial de la manutention tout terrain
Manitou, world wide leader of rough terrain handling equipment
Manitou, Der Weltmarktführer für geländegängige Flurförderstapler
Manitou, Líder mundial de la manutención todo terreno



MANISCOPIC

MANITOU

MANIACCESS

Twisco

MANITRANSIT

MANIHOE

MANILOADER

MANILEC

Un réseau de spécialistes
à votre service

A network of skilled
professionals at
your service

Una red de especialistas
a su servicio

Ein dichtes Netz von
Spezialisten steht zu
Ihrer verfügung



MLM

Z.I., 5 avenue du Vert-Galant 95310 SAINT OUEEN-L'AUMONE FRANCE
Tél. : +33 (0) 1.34.32.65.06 or 08 Fax : +33 (0) 1.34.32.65.10

 **MANITOU**